

A—How to disassemble the calendar clock

- 1.** Remove the serial number sticker.



- 2.** Remove 5 screws from the back casing.



- 3.** Open and empty the Year compartment.



- 4.** Dislodge the battery contacts, and remove the back casing.



- 5.** Remove the support boards.



- 6.** Remove the Date and Week flaps.



7. Remove the Month support board and 2 screws.




8. Remove the Month flips.



9. Remove the micro switch.



10. Unplug the wire attachment.

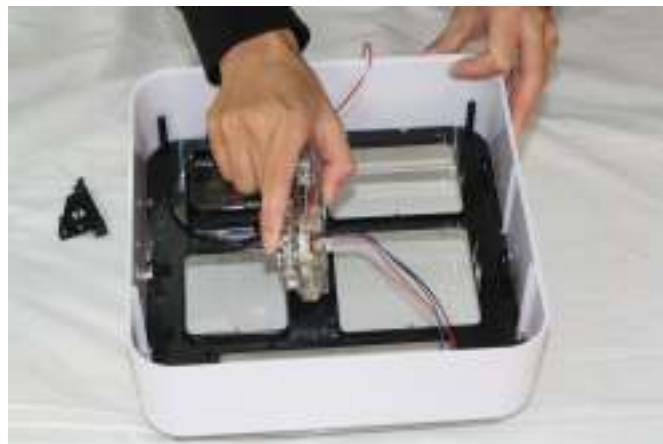

11. Gently pull out the mechanism set.


B --- How to re-assemble the calendar clock



1-1 Arrange the Month and Date wires.



1-2 Install the Month and Date mechanism.

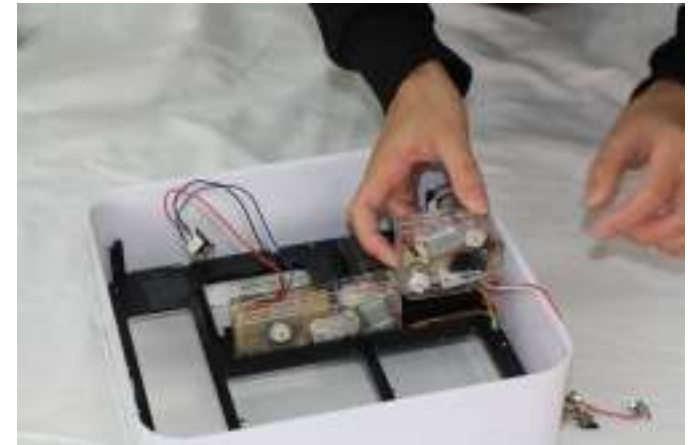


2. Tidy the Week wires.



3. Install the Week mechanism.



4. Plug in the wire attachment.

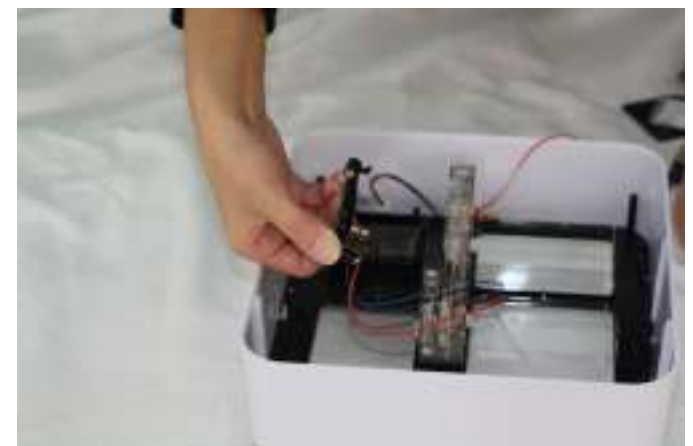

5. Install the micro switch.




6. Install the Month support board.



7. Install the Month turn knob.



8. Install the Month flips.

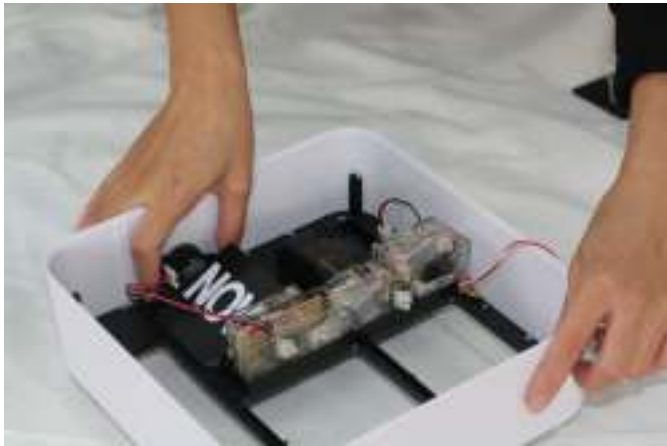

9. Screw in the support board screw.



10. Install the Week flips.



11. Install the Date flips.



12. Re-install the support board.



13. Hide the wires behind the support board.



14. Tidy the wires and re-install the battery contact.



15. Replace the back casing and screw in the 5 screws.



16. Replace the serial number sticker and the Year.